


Hybrid Inverter


10-12KW Single-phase LV Series

- Support storing energy from diesel generator
- 6 Time periods for battery charging/discharging
- Max. Charging/discharging current 190A
- AC couple to retrofit existing solar system
- 6 Time periods for battery charging/discharging
- Colorful touch lcd, IP65

Product Characteristics

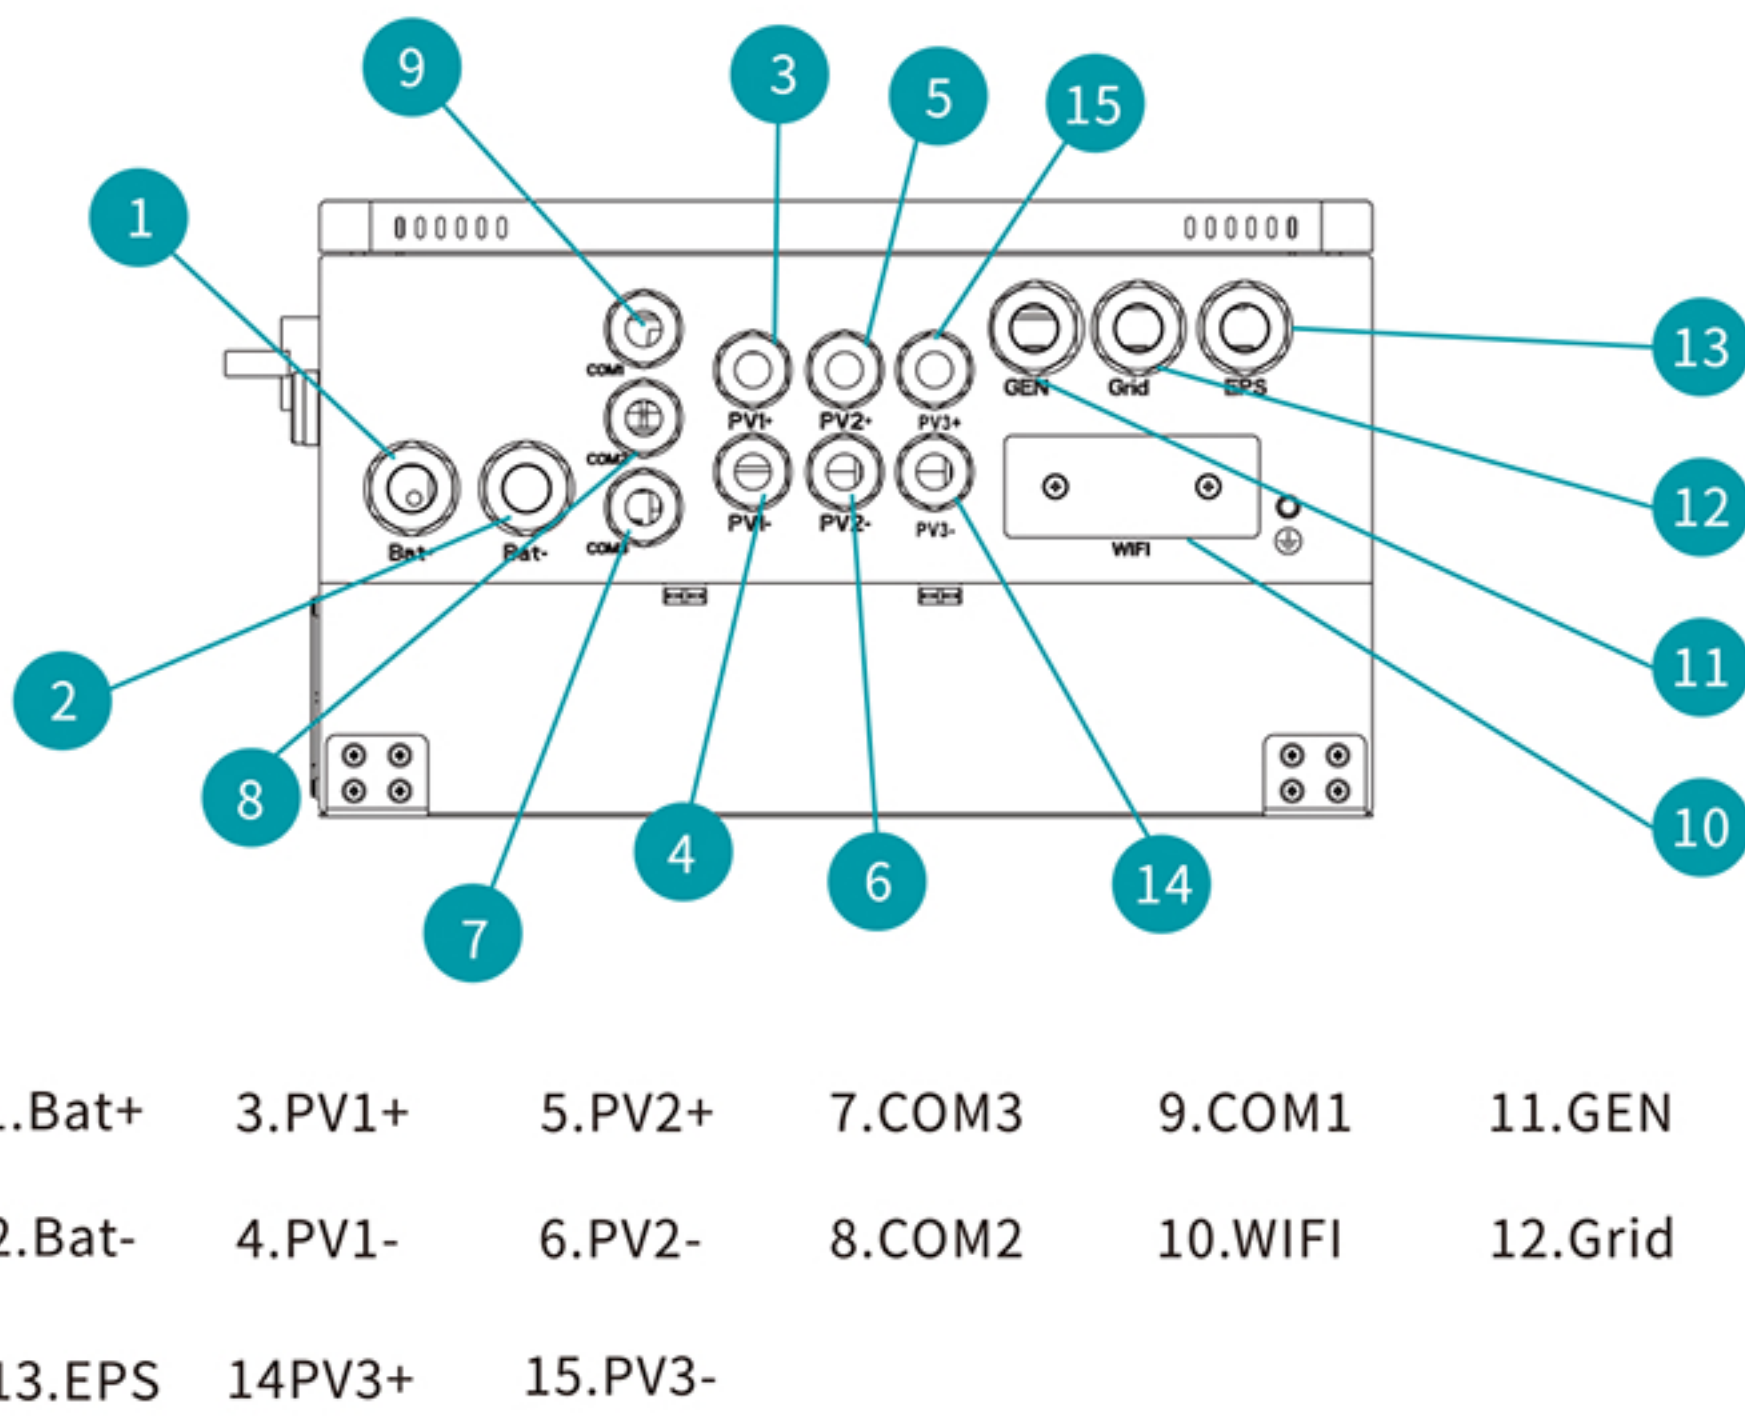

Application System Diagram

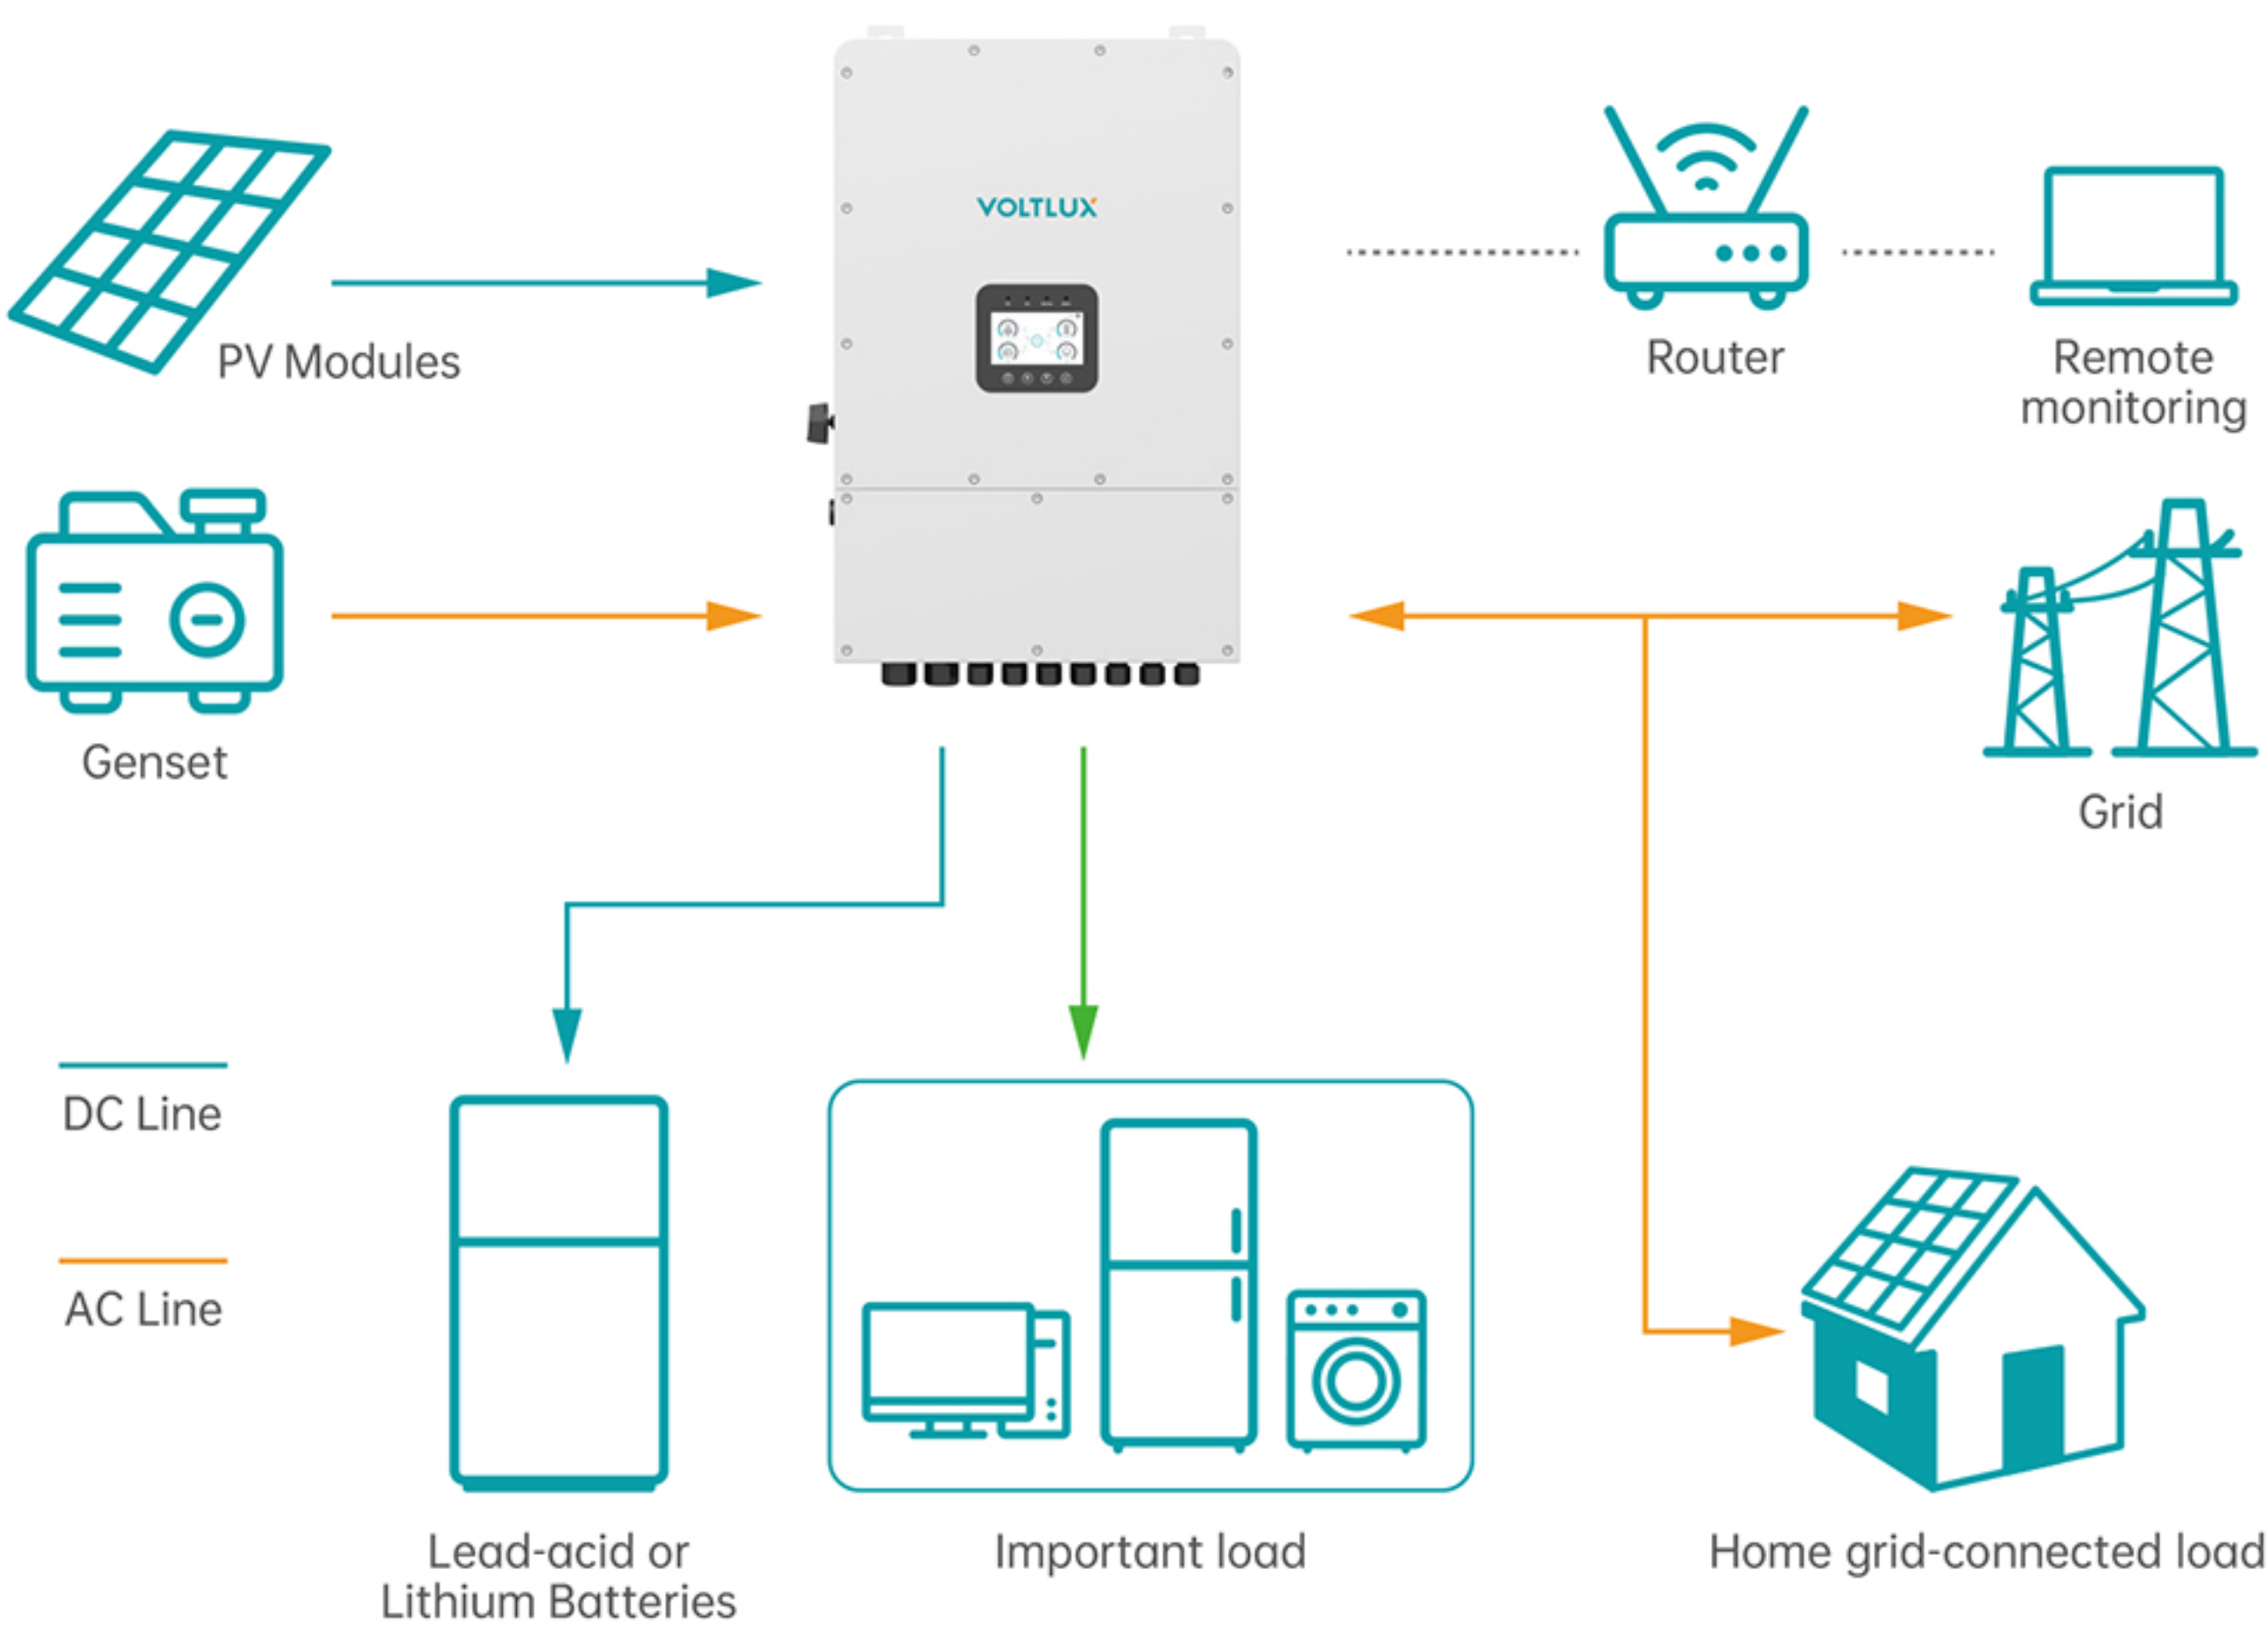

10

Technical Properties

Model	10	12
Battery Input		
Battery Type	Lead-acid or Li-Ion	
Battery Voltage Range(V)	40-60	
Max. Charging Current(A)	220	250
Max. Discharging Current(A)	220	250
Charging Curve	3 Stages / Equalization	
External Temperature Sensor	yes	
Charging Strategy for Li-Ion Battery	Self-adaption to BMS	
PV String Input		
Max. DC Input Power(W)	13000	15600
PV Input Voltage(V)	370V (125V~500V)	
MPPT Range(V)	150~425V	
Full Load DC Voltage Range	200~425V	
Start-up Voltage(V)	125V	
PV Input Current(A)	26+26+26	26+26+26
No. of MPPT Trackers	3	3
No. of Strings Per MPPT Tracker	2+2+2	2+2+2
PV String Output		
Rated AC Output and UPS Power(W)	10000	12000
Max. AC Output Power(W)	11000	13200
Peak Power(off grid)	2 times of rated power, 10 S	
AC Output Rated Current(A)	43.5	52.2
Max. AC Current(A)	47.8	57.4
Max. Continuous AC Passthrough(A)	60	60
Power Factor	0.8 leading to 0.8 lagging	
Output Frequency and Voltage	50/60Hz; L/N/PE 220/230V (single phase)	
Grid Type	Single Phase	
Total Harmonic Distortion (THD)	<3% (of nominal power)	
DC current injection	<0.5% In	
Efficiency		
Max PV Conversion Efficiency	97.60%	
European Efficiency	96.50%	
MPPT Efficiency	>99%	
Protection		
PV Arc Fault Detection	Integrated	
PV Input Lightning Protection	Integrated	
Anti-islanding Protection	Integrated	
PV String Input Reverse Polarity Protection	Integrated	
Insulation Resistor Detection	Integrated	
Residual Current Monitoring Unit	Integrated	
Output Over Current Protection	Integrated	
Output Shorted Protection	Integrated	
Over Voltage Category	Integrated	
Surge Protection	DC Type II / AC Type II	
Certifications and Standards		
Grid Regulation	IEC61727/EN50549-1	
Safety EMC / Standard	IEC/EN 61000-6/2/4, IEC/EN 62109-1, IEC/EN 62109-2	
General		
Operating Temperature Range (°C)	-40-60°C, >45°C Derating	
Cooling	Smart Cooling	
Noise (dB)	≤30 dB	
Communication with BMS	RS485; CAN	
Monitoring mode	WIFI, APP	
Weight (kg)	24	31
Size (W x H x D mm)	330W×580H×232D (Excluding connectors and brackets)	
Protection Degree	IP65	
Installation Style	Wall-mounted	
Warranty	5 years	