
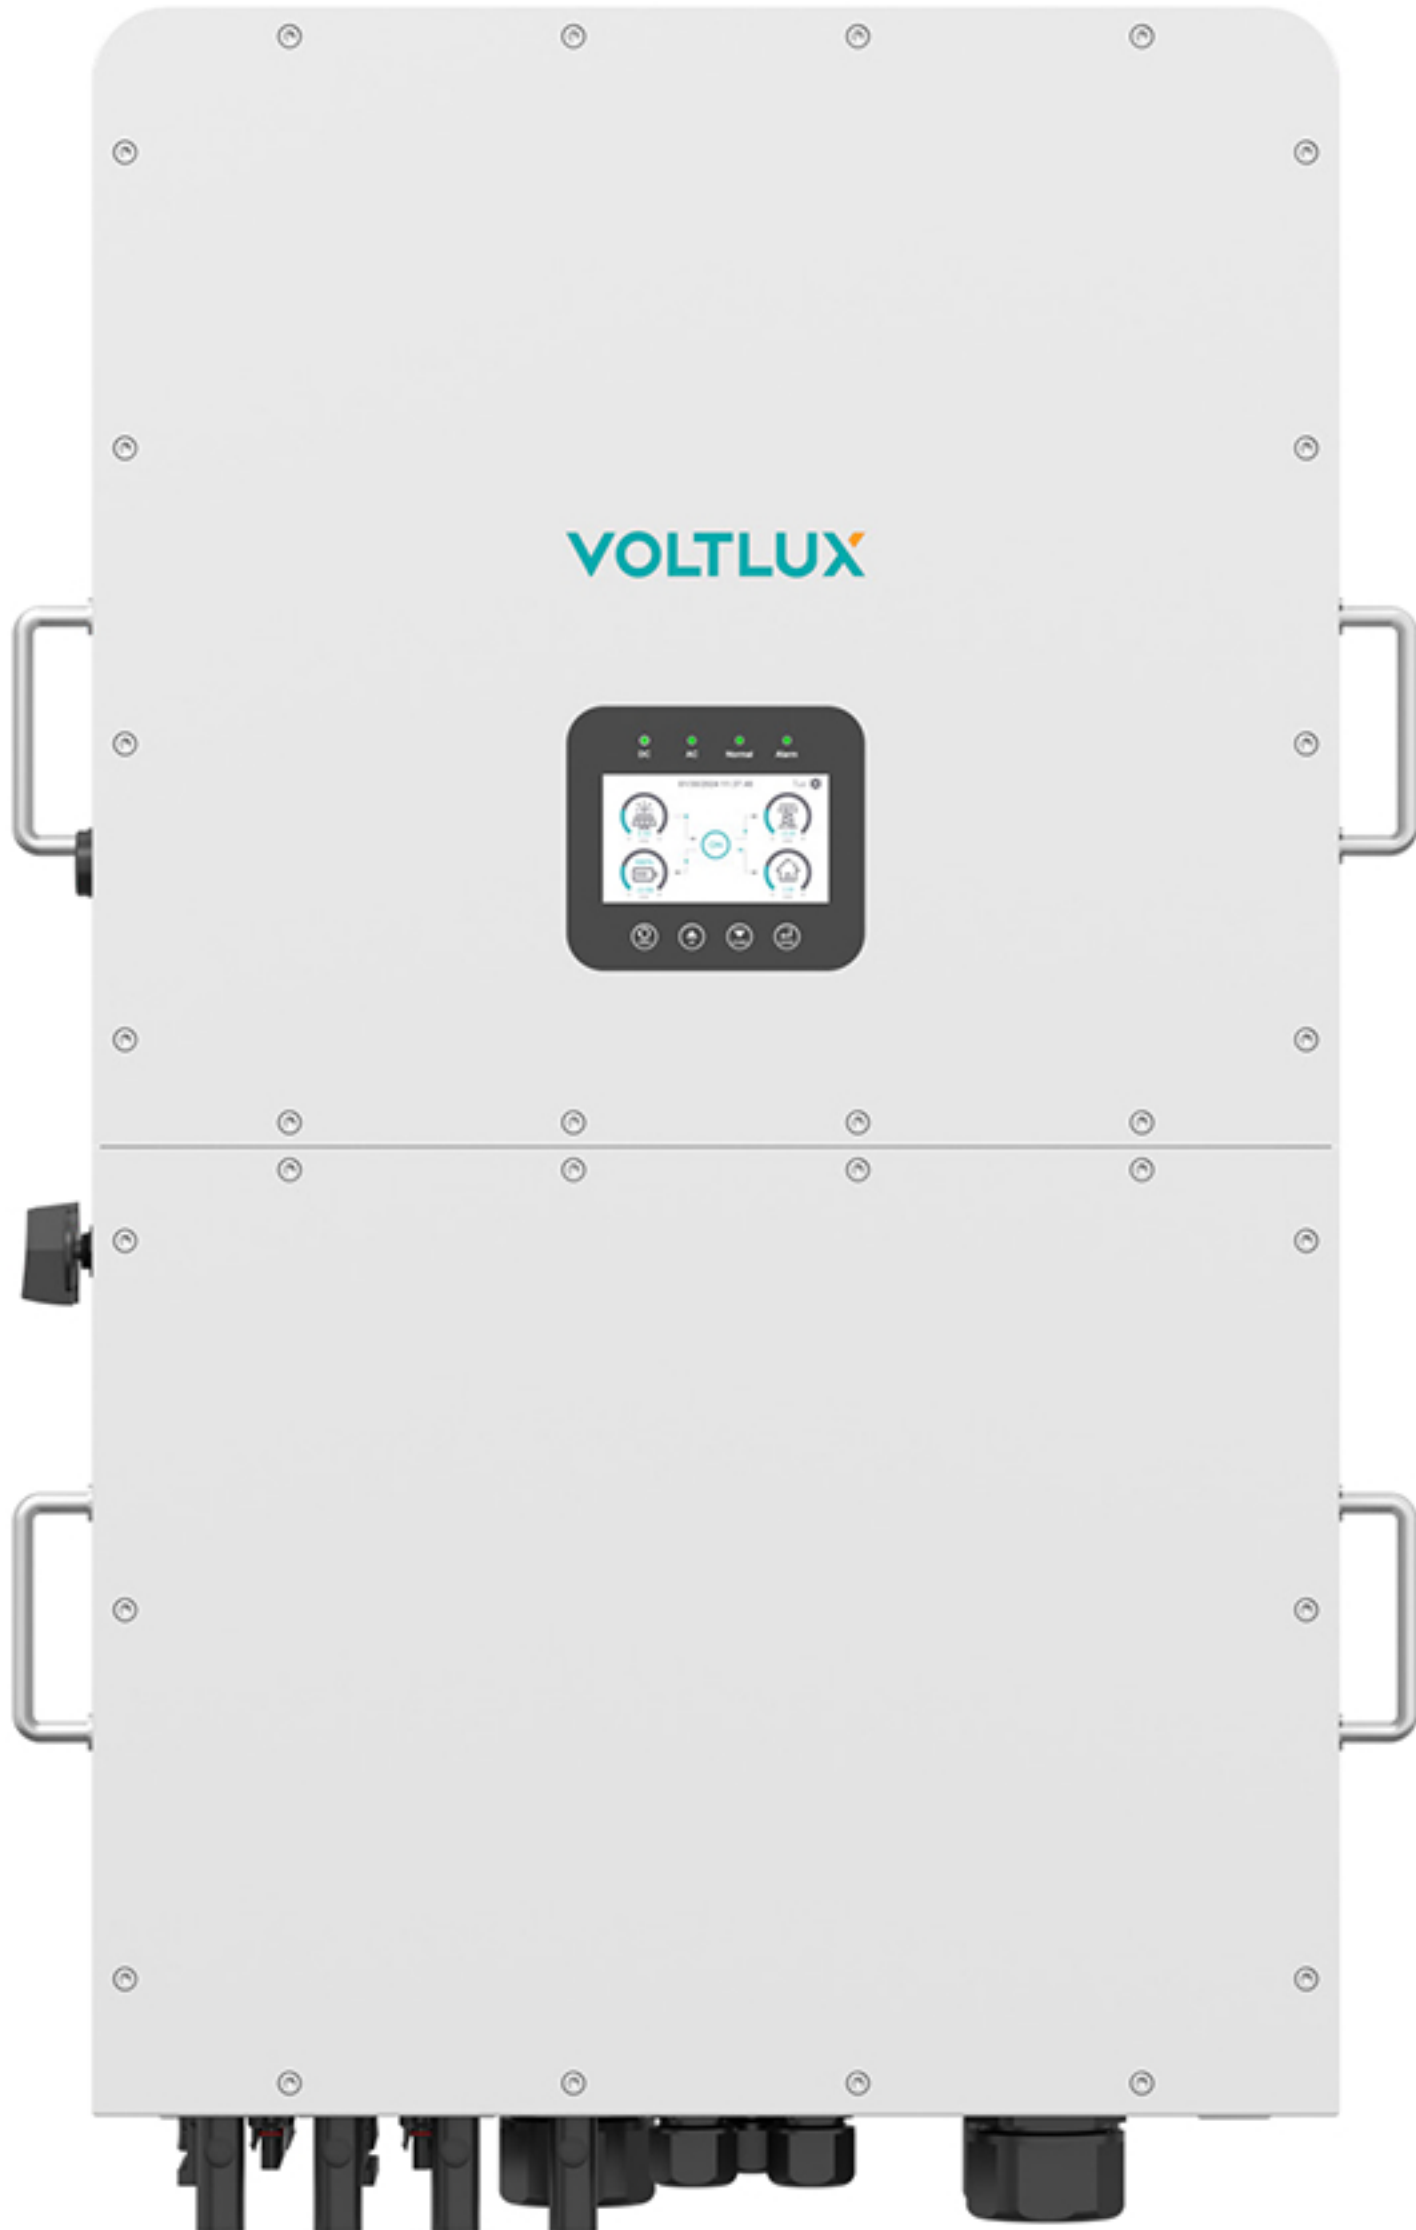


Three Phase Hybrid Inverter


30-50KW LV Series

- 100% three-phase unbalanced output, with each phase cap
- AC couple to retrofit existing solar system
- Max.10 pcs parallel for on-grid and off-grid operation; Support multiple batteries parallel
- Max. charging / discharging current of 100A
- High voltage battery, higher efficiency
- 6 time periods for battery charging / discharging
- Support storing energy from diesel generator

Product Characteristics

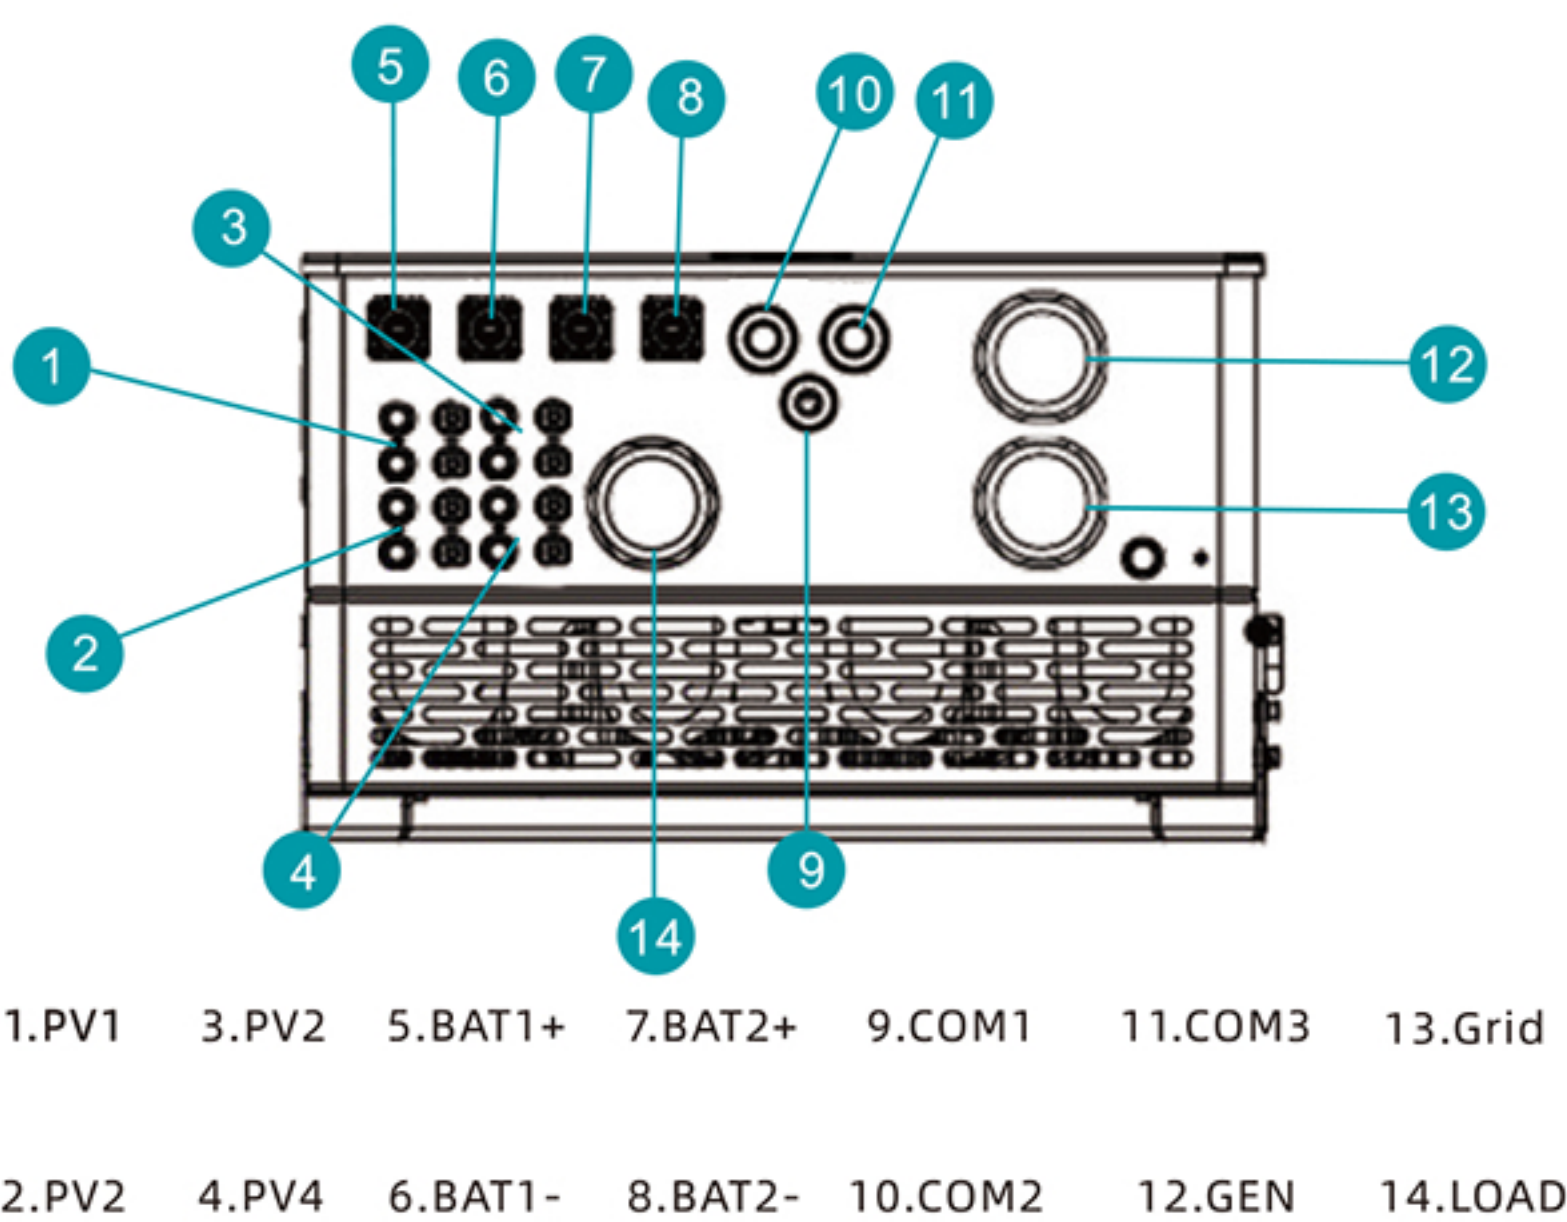

Application System Diagram

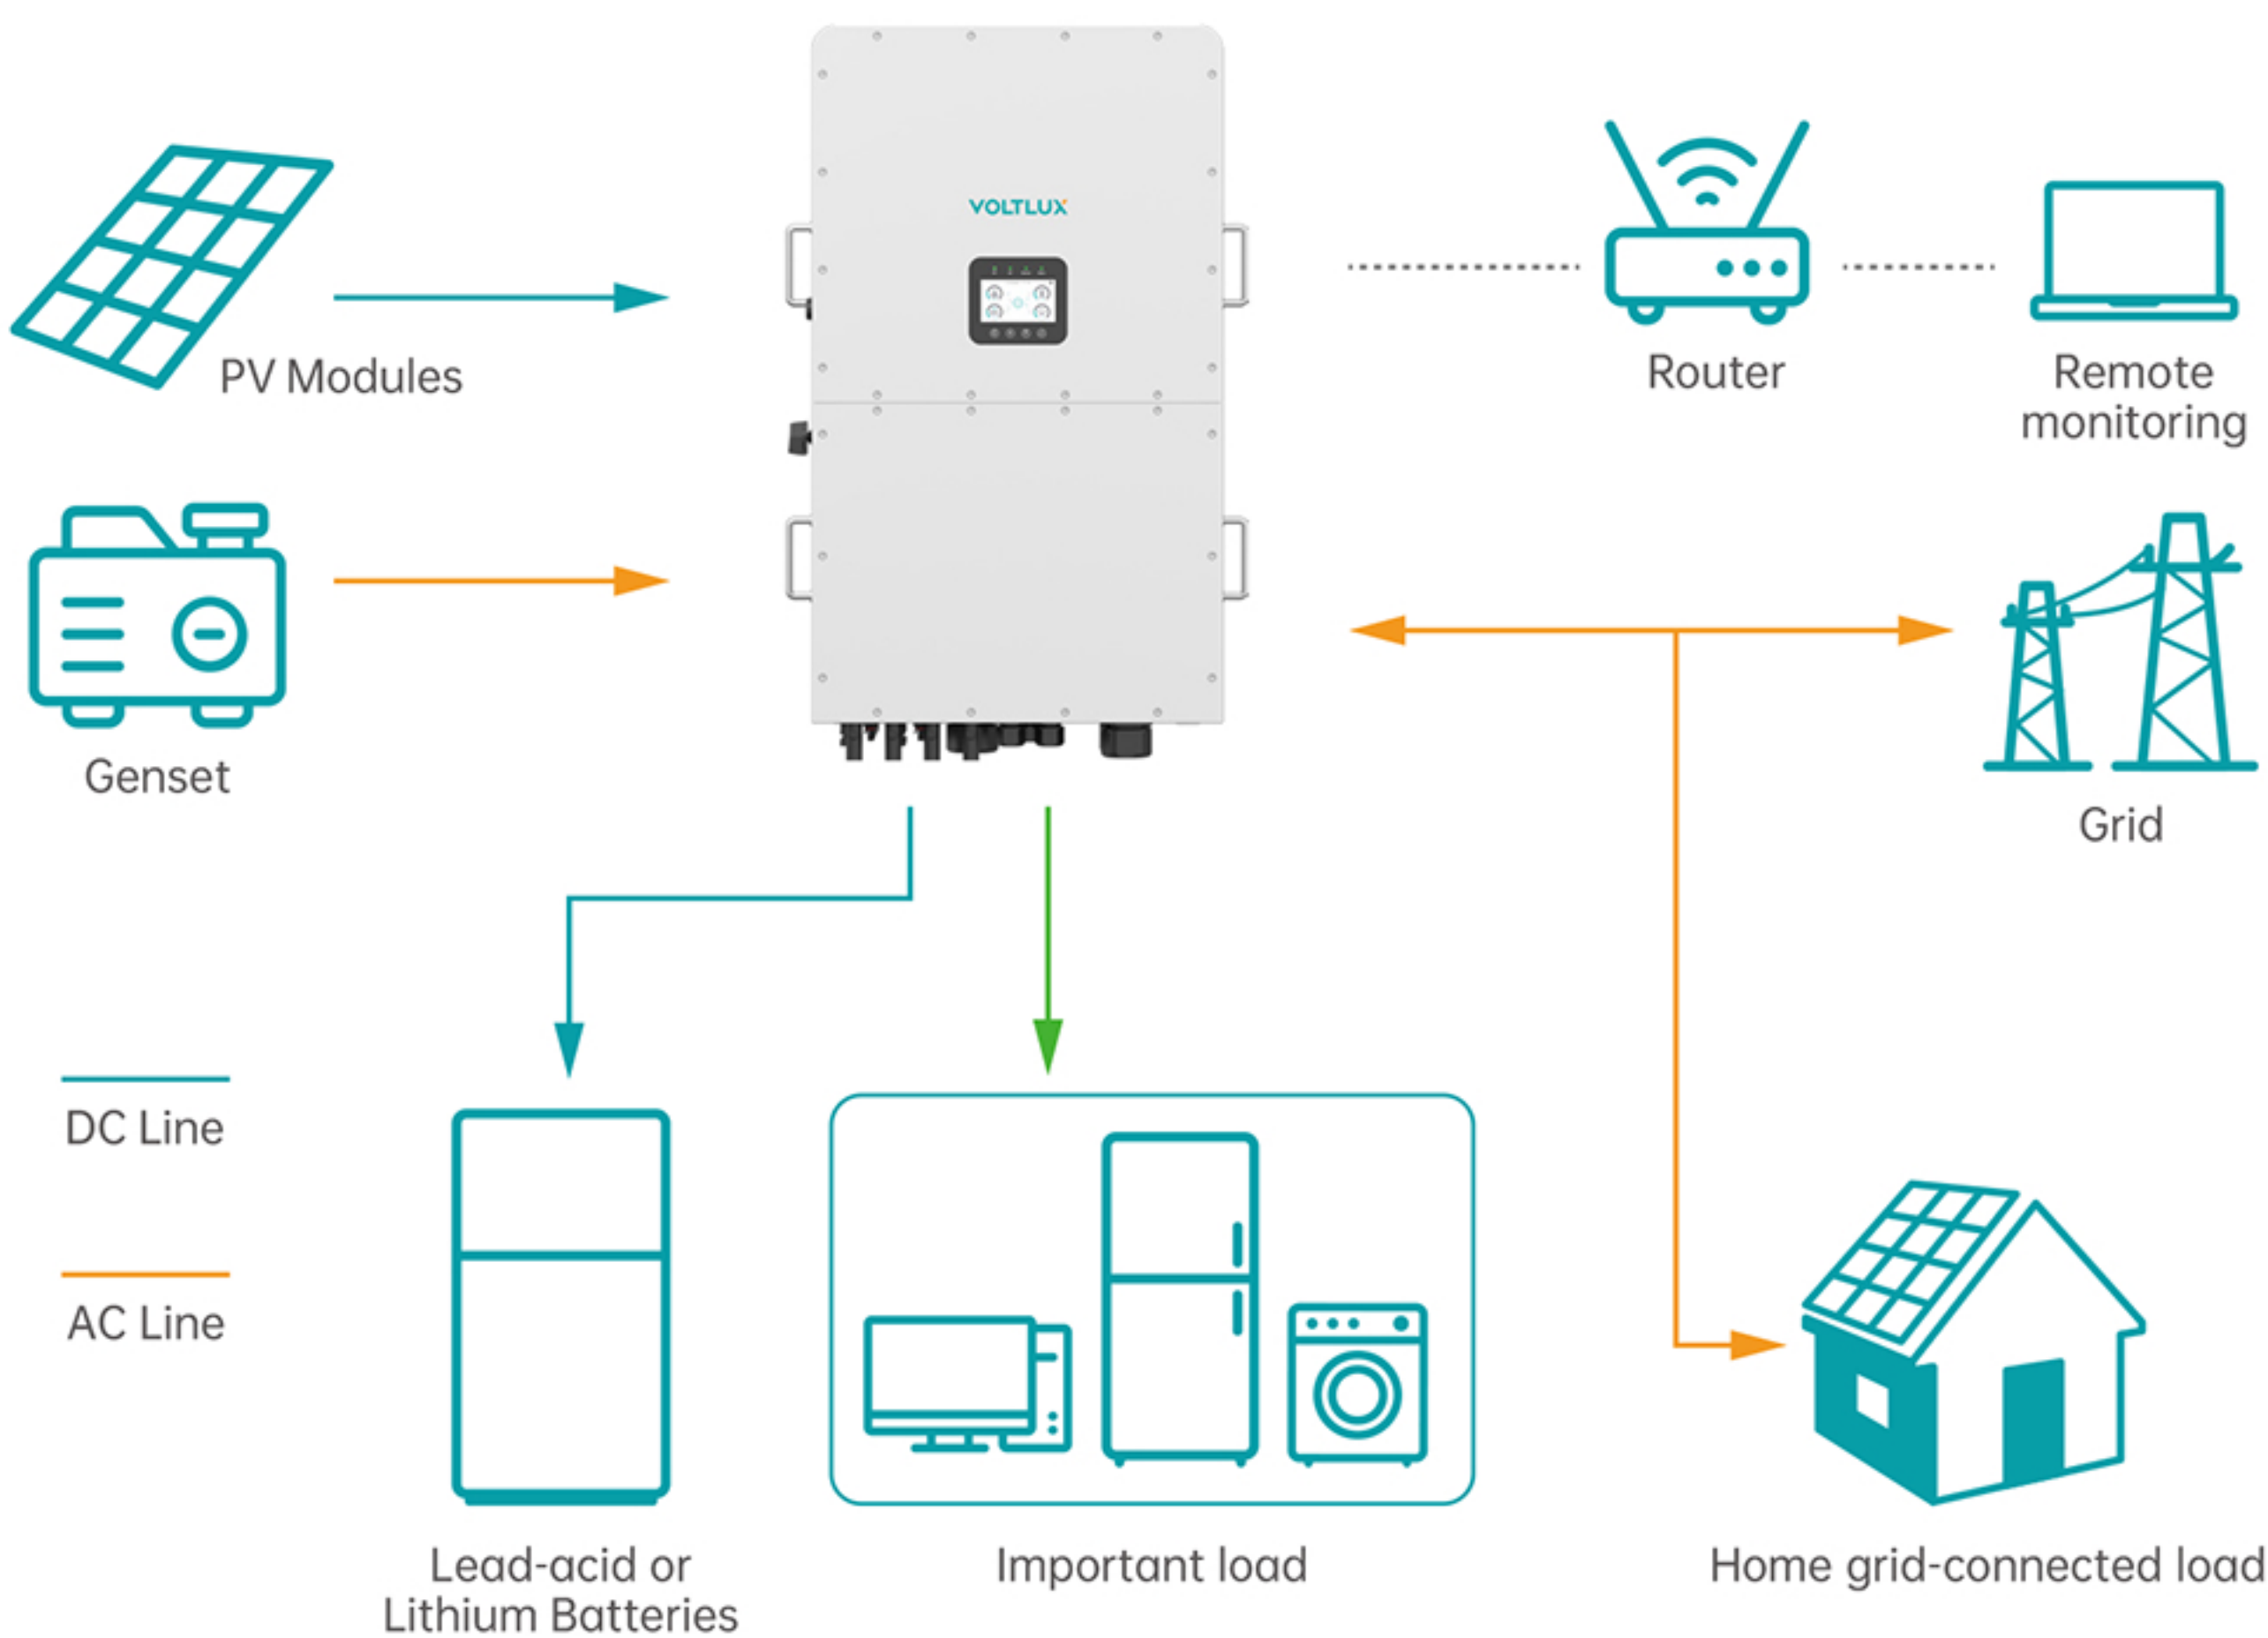

Technical Properties

Model	30	40	50
PV String Input			
Max. DC Input Power (W)	39000	52000	65000
Max. DC Input Voltage (V)	1000		
Start-up Voltage (V)	180		
MPPT Voltage Range (V)	150-850		
Full Load DC Voltage Range (V)	360-850	360-850	450-850
Rated DC Input Voltage (V)	600		
PV Input Current (A)	36+36+36	36+36+36+36	36+36+36+36
Max. PV Isc (A)	55+55+55	55+55+55+55	55+55+55+55
No.of MPPT Trackers	3	4	4
No.of Strings per MPPT Tracker	2+2+2	2+2+2+2	2+2+2+2
AC Output			
Rated AC Output Power (W)	30000	40000	50000
Max AC Output Power (W)	33000	44000	55000
AC Output Rated Current (A)	45.6	60.8	76.0
Max AC Output Current (A)	50.2	66.9	83.6
Max.Three-phase Unbalanced Output Current(A)	60	70	83.3
Max. Continuous AC Passthrough(A)	200		
Peak Power (Off Grid)	1.5 times of rated power, 10 S		
Generator Input/Smart Load/AC Couple Current(A)	45.5/200/45.5	60.7/200/60.7	75.8/200/75.8
Power Factor	0.8 leading to 0.8 lagging		
Output Frequency and Voltage	50/60Hz; 3L/N/PE 220/380Vac, 230/400Vac		
Grid Type	Three Phase		
Total Harmonic Current Distortion (THDi)	<3% (of nominal power)		
DC Current Injection	<0.5% In		
Battery			
Battery Type	Lithium-ion		
Battery Voltage Range (V)	160-800		
Max. Charging Current (A)	50+50		
Max. Discharging Current (A)	50+50		
Number of Battery Input	2		
Charging Strategy for Li-Ion Battery	Self-adaption to BMS		
Efficiency			
Max PV Conversion Efficiency	97.6%		
European Efficiency	97.0%		
MPPT Efficiency	99.9%		
Protection			
Anti-islanding Protection	Yes		
PV String Input Reverse Polarity	Yes		
Insulation Resistor Detection	Yes		
Residual Current Monitoring Unit	Yes		
Output Over Current Protection	Yes		
Output Shorted Protection	Yes		
Surge Protection	Yes		
Arc Fault Circuit Interruption (AFCI optional)	Yes		
Over Voltage Category	DC Type II/AC Type III		
Certifications and Standards			
Grid Regulation	IEC61727/62116,EN50549-1		
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2		
General			
Operating Temperature Range (°C)	-40-60°C, >45°C Derating		
Cooling	Smart Cooling		
Noise (dB)	≤65 dB		
Communication with BMS	CAN		
Monitoring mode	WIFI, APP		
Weight (kg)	80		
Size (W x H x D mm)	527×894×294 (Excluding Connectors and Brackets)		
Ingress Protection	IP65		
Installation Style	Wall-mounted		
Warranty	5 Years (10 Years Optional)		