




Product Manual

A close-up photograph showing a single, long, thin wooden plank lying horizontally on a surface of light-colored gravel or crushed stone. The plank is weathered and has a reddish-brown hue. The gravel is composed of small, irregular particles. The image is part of a horizontal strip of four photographs.

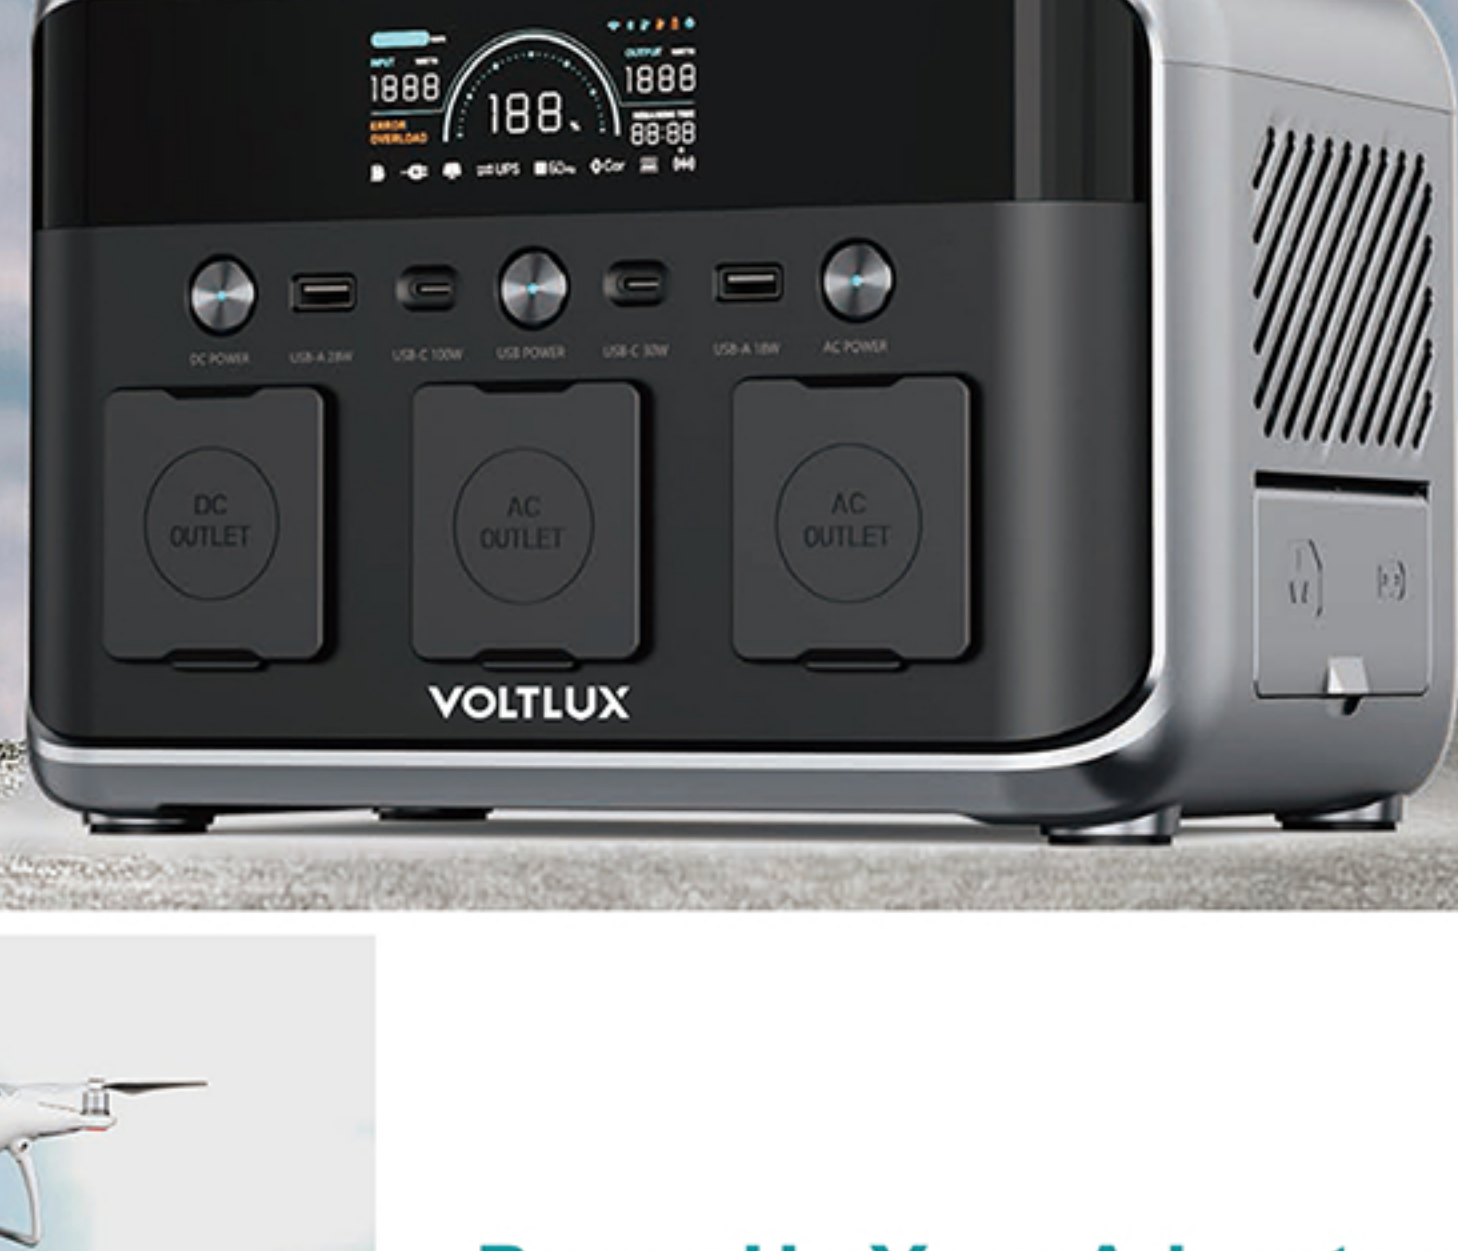


(20W) (21.5W) (20W)

600W	481.5Wh	
Rated Large Power Output	High-Capacity	Superior Two-Stage

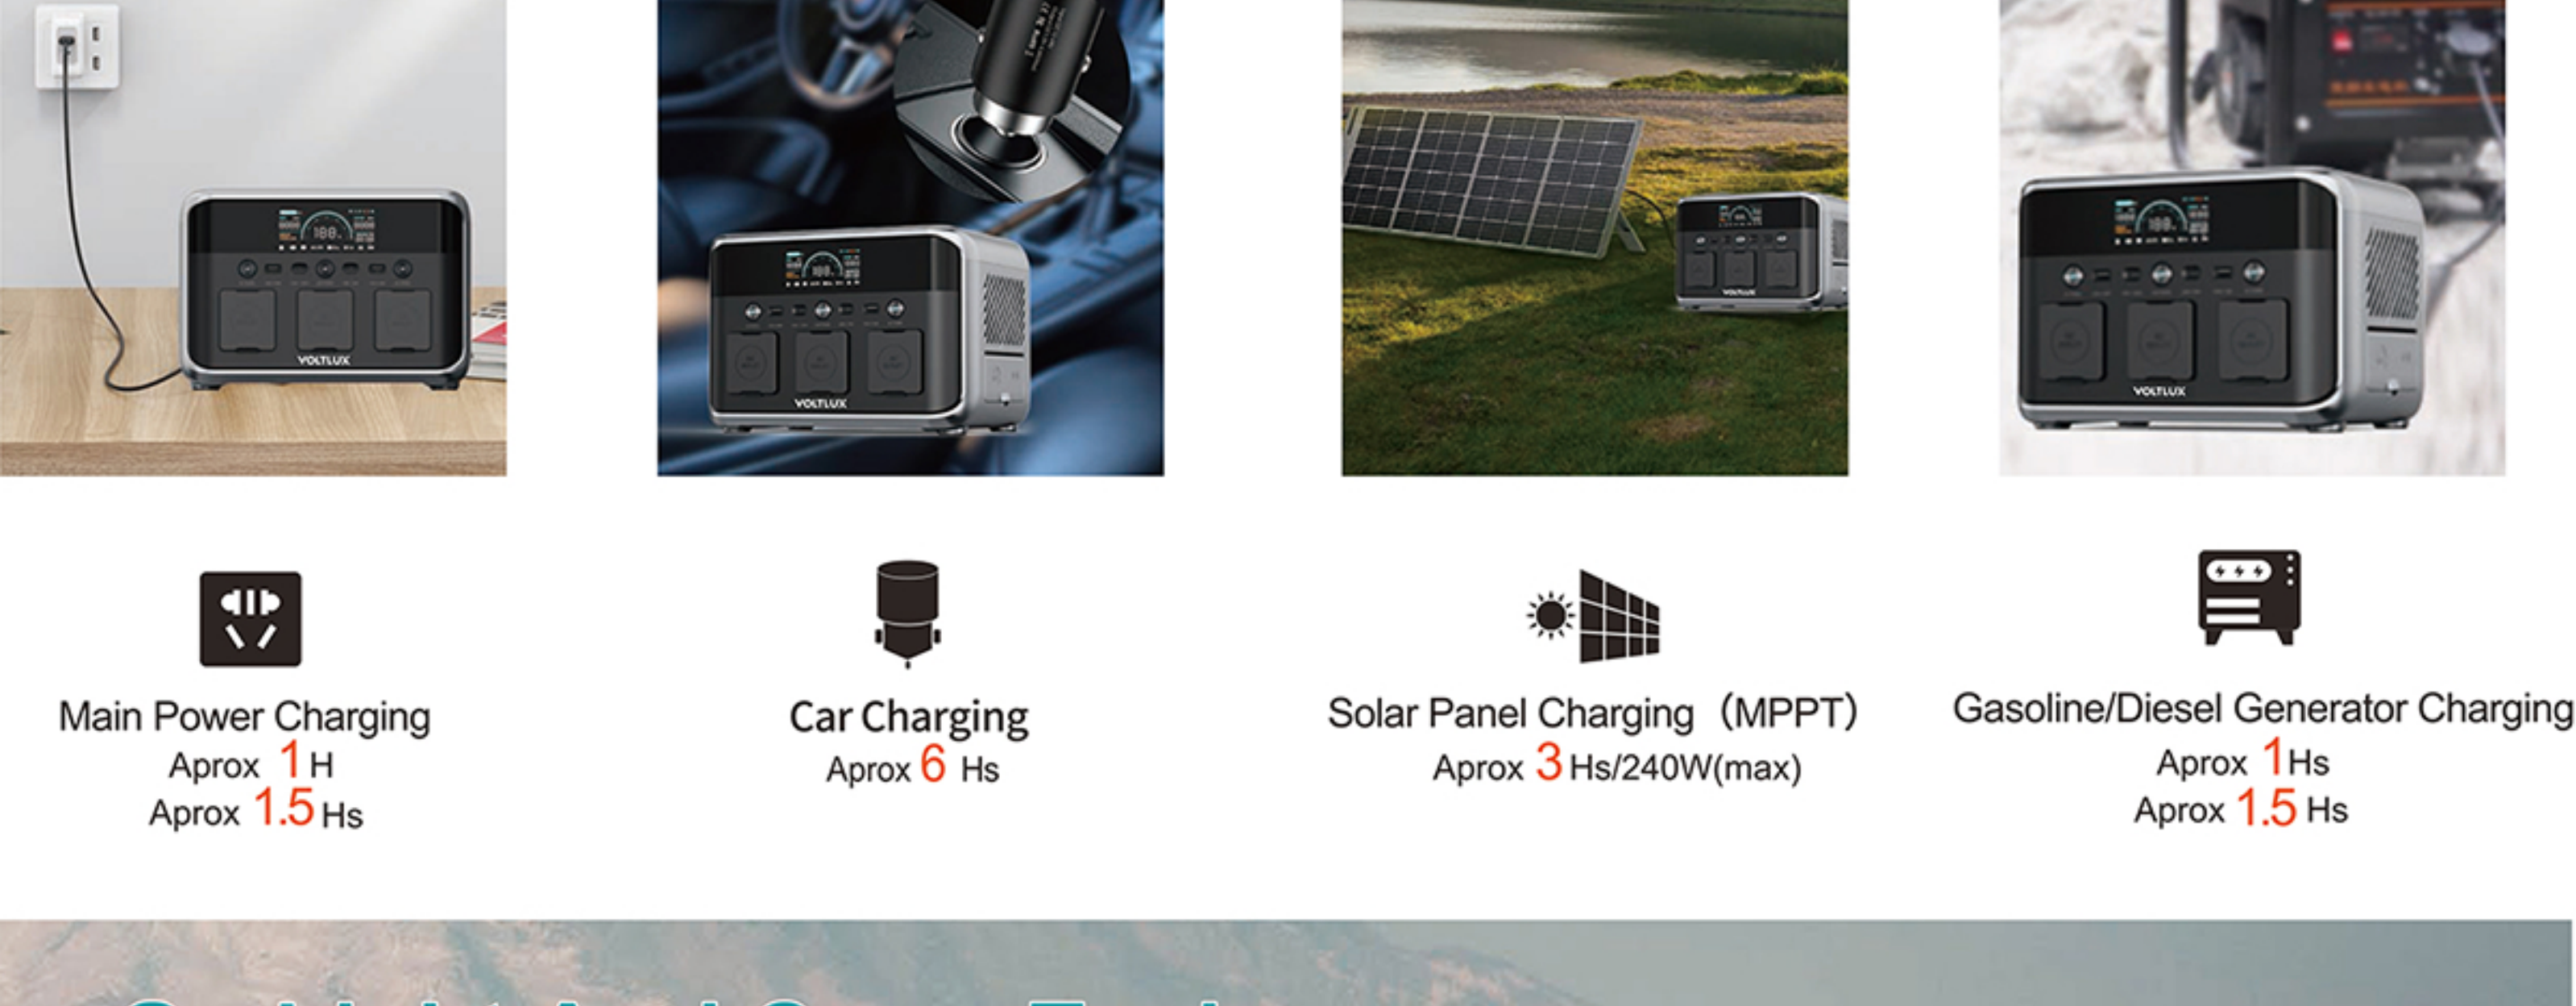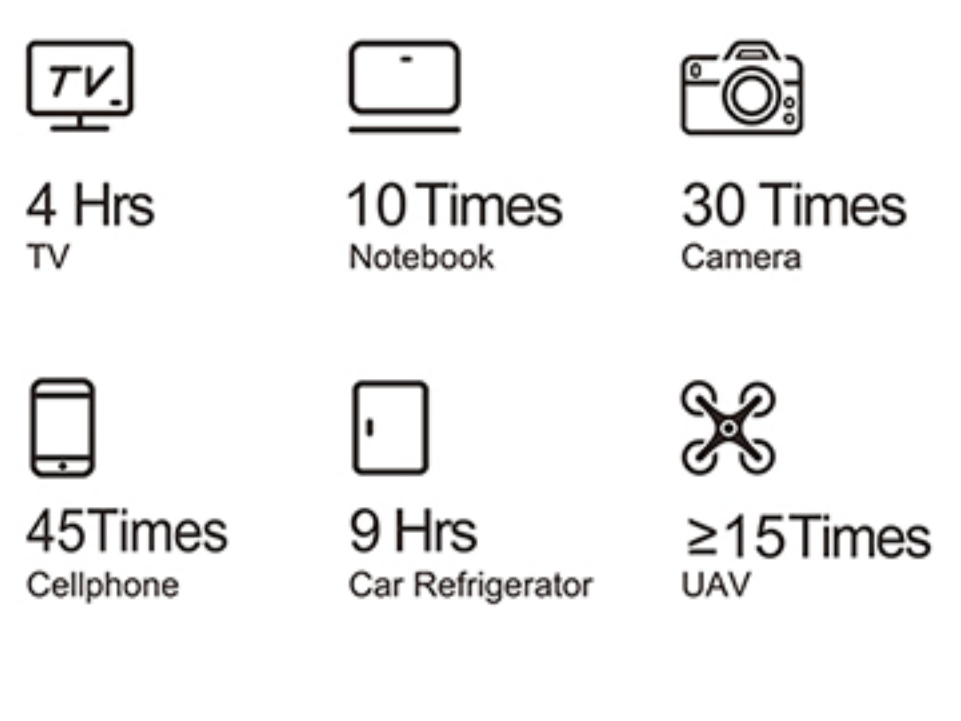


Smaller and Lighter, Soylent Charging

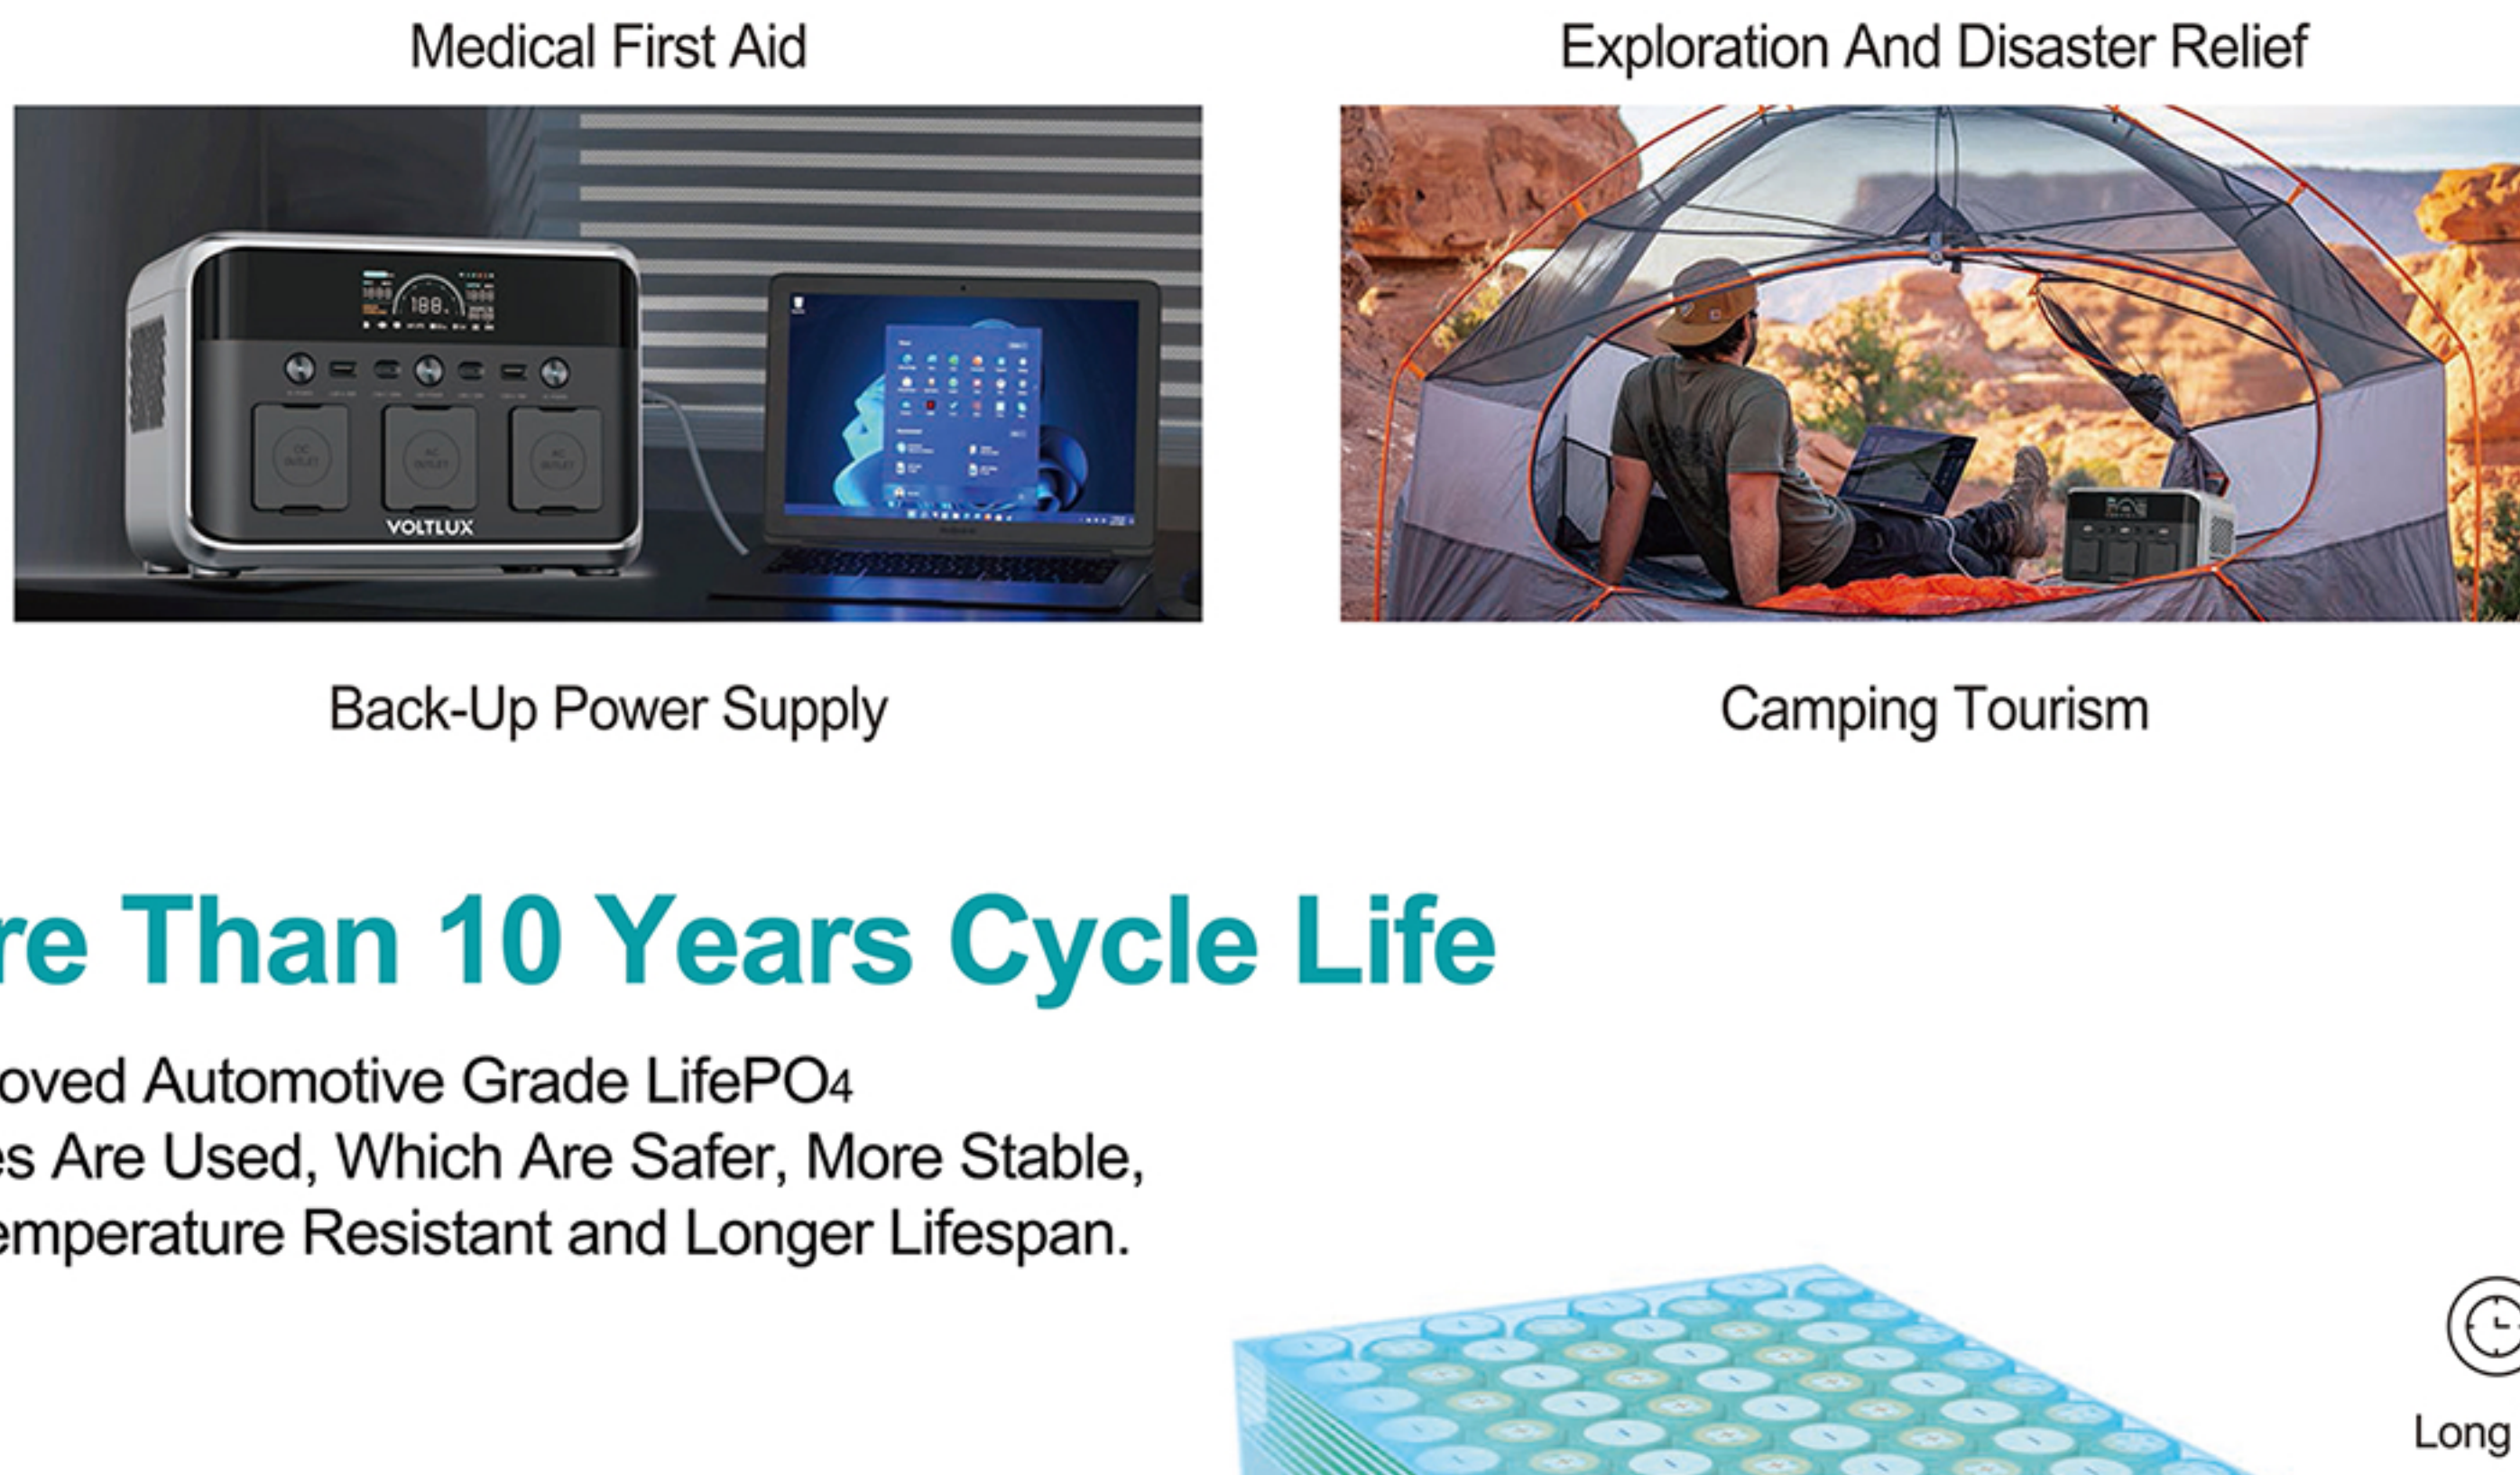


3500 Times+ Cycle

Battery Cycle Life

Why Are Batteries That Pass the Needling Test Safer

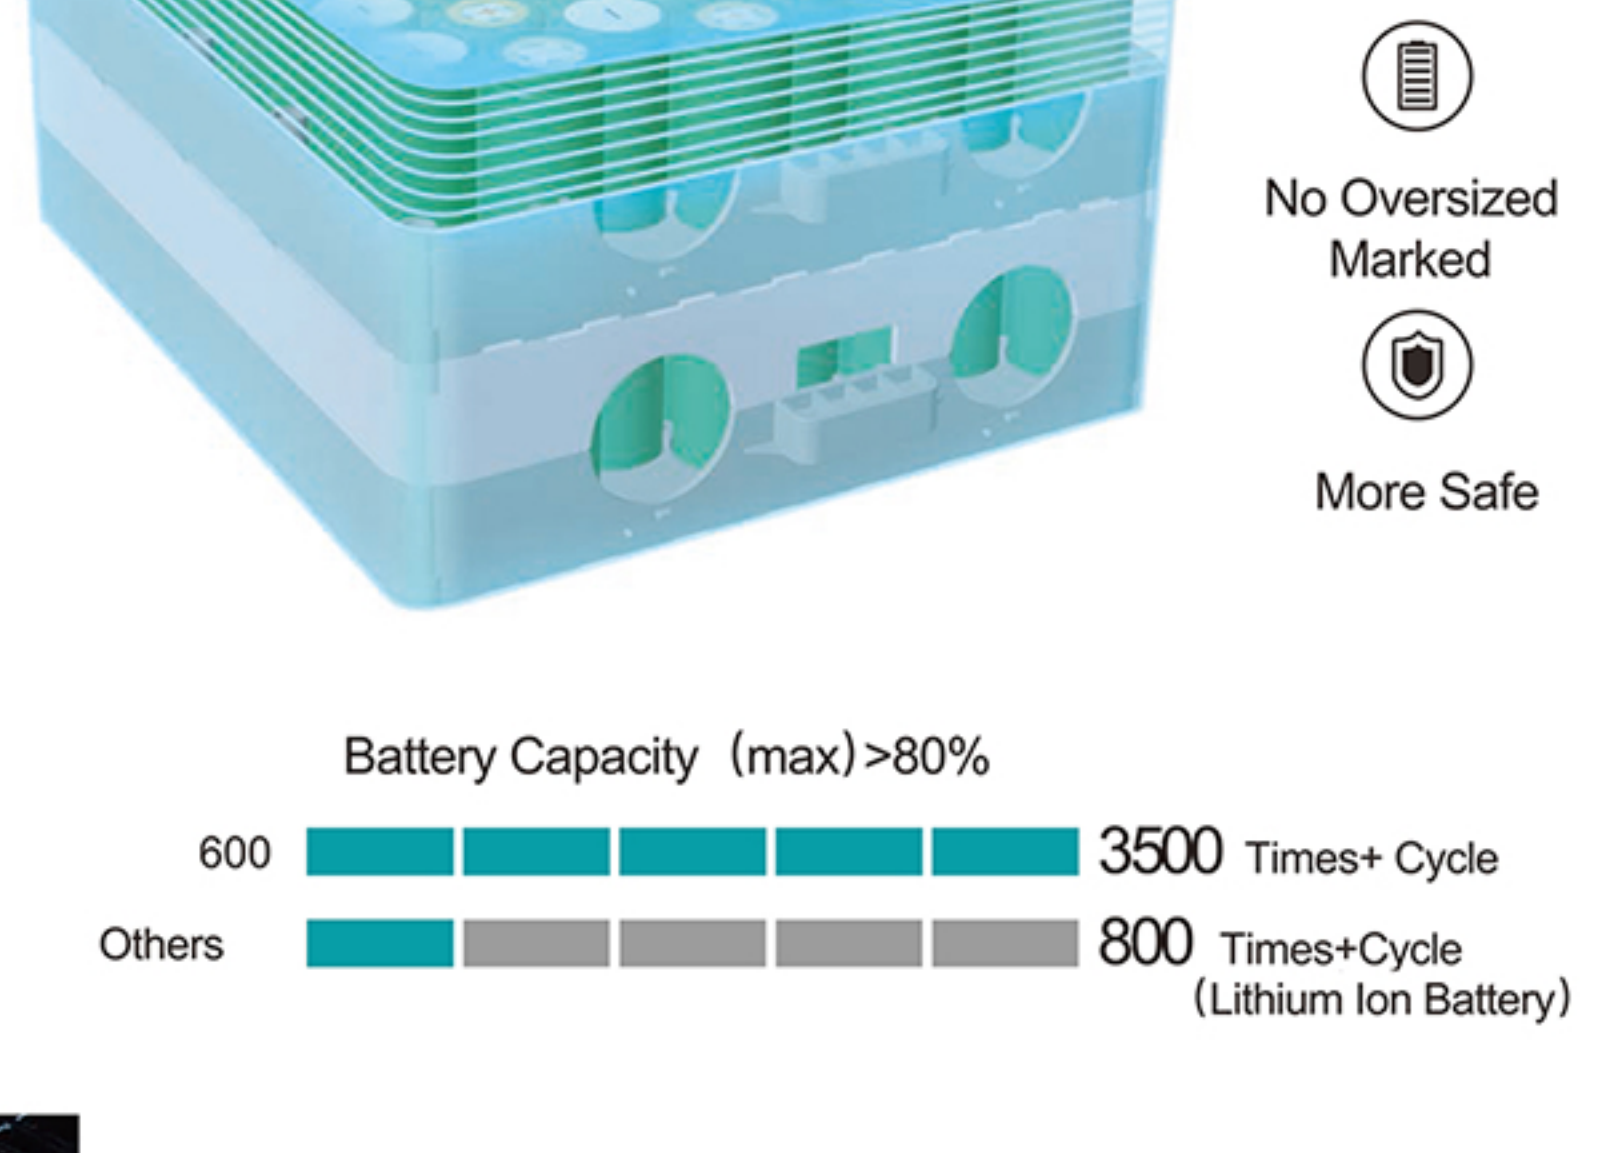



Quality Inspections

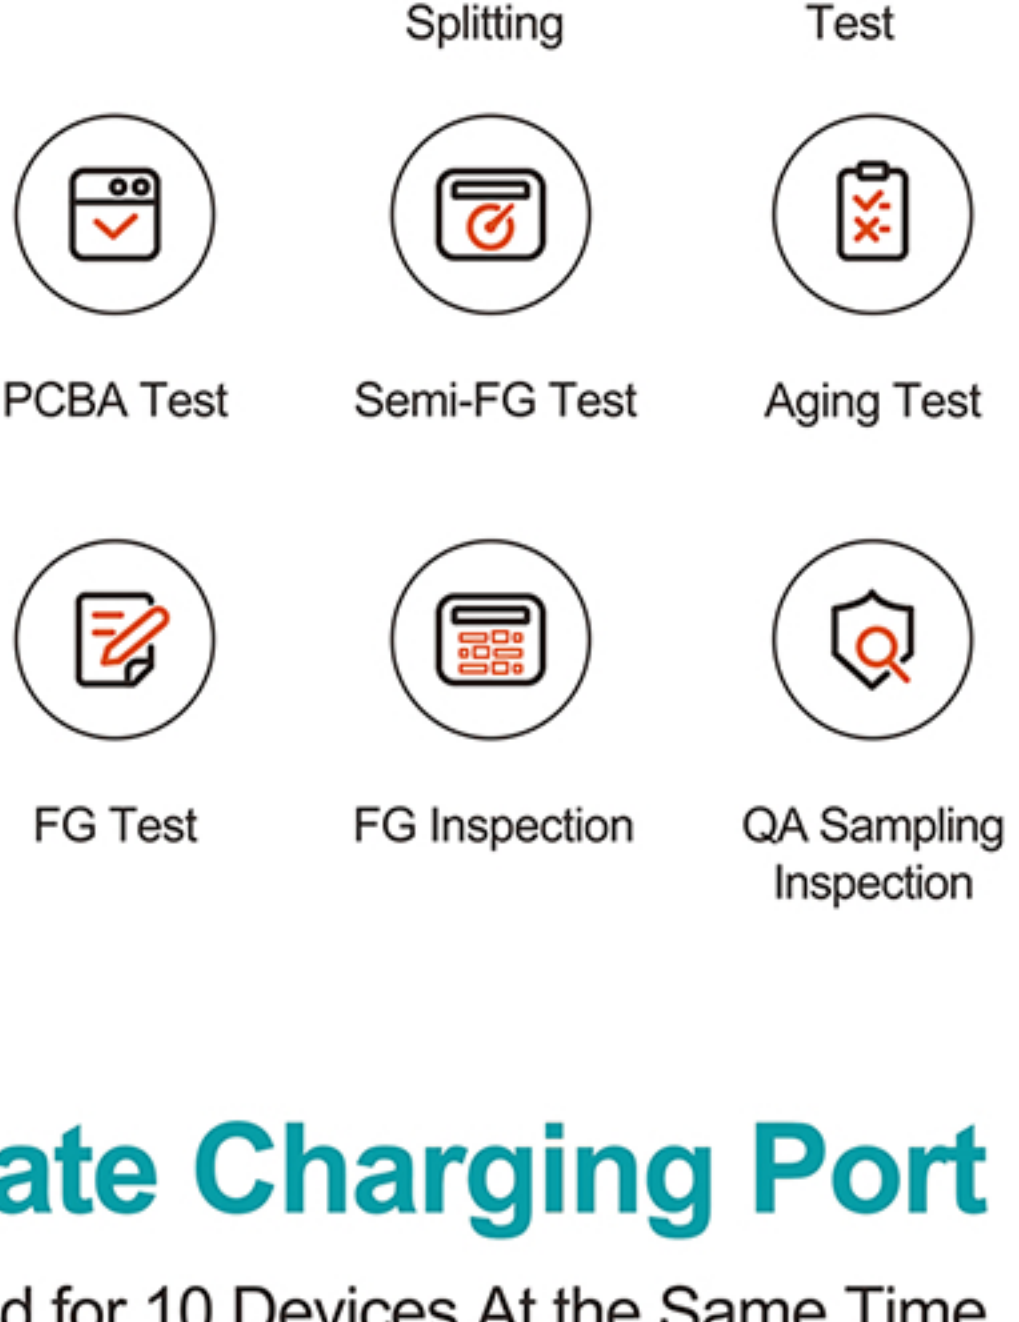

A person is sitting on a couch, using a laptop. A portable power station is visible in the foreground, displaying a digital readout of 100% battery level.



Precise Quality, Attention To Details

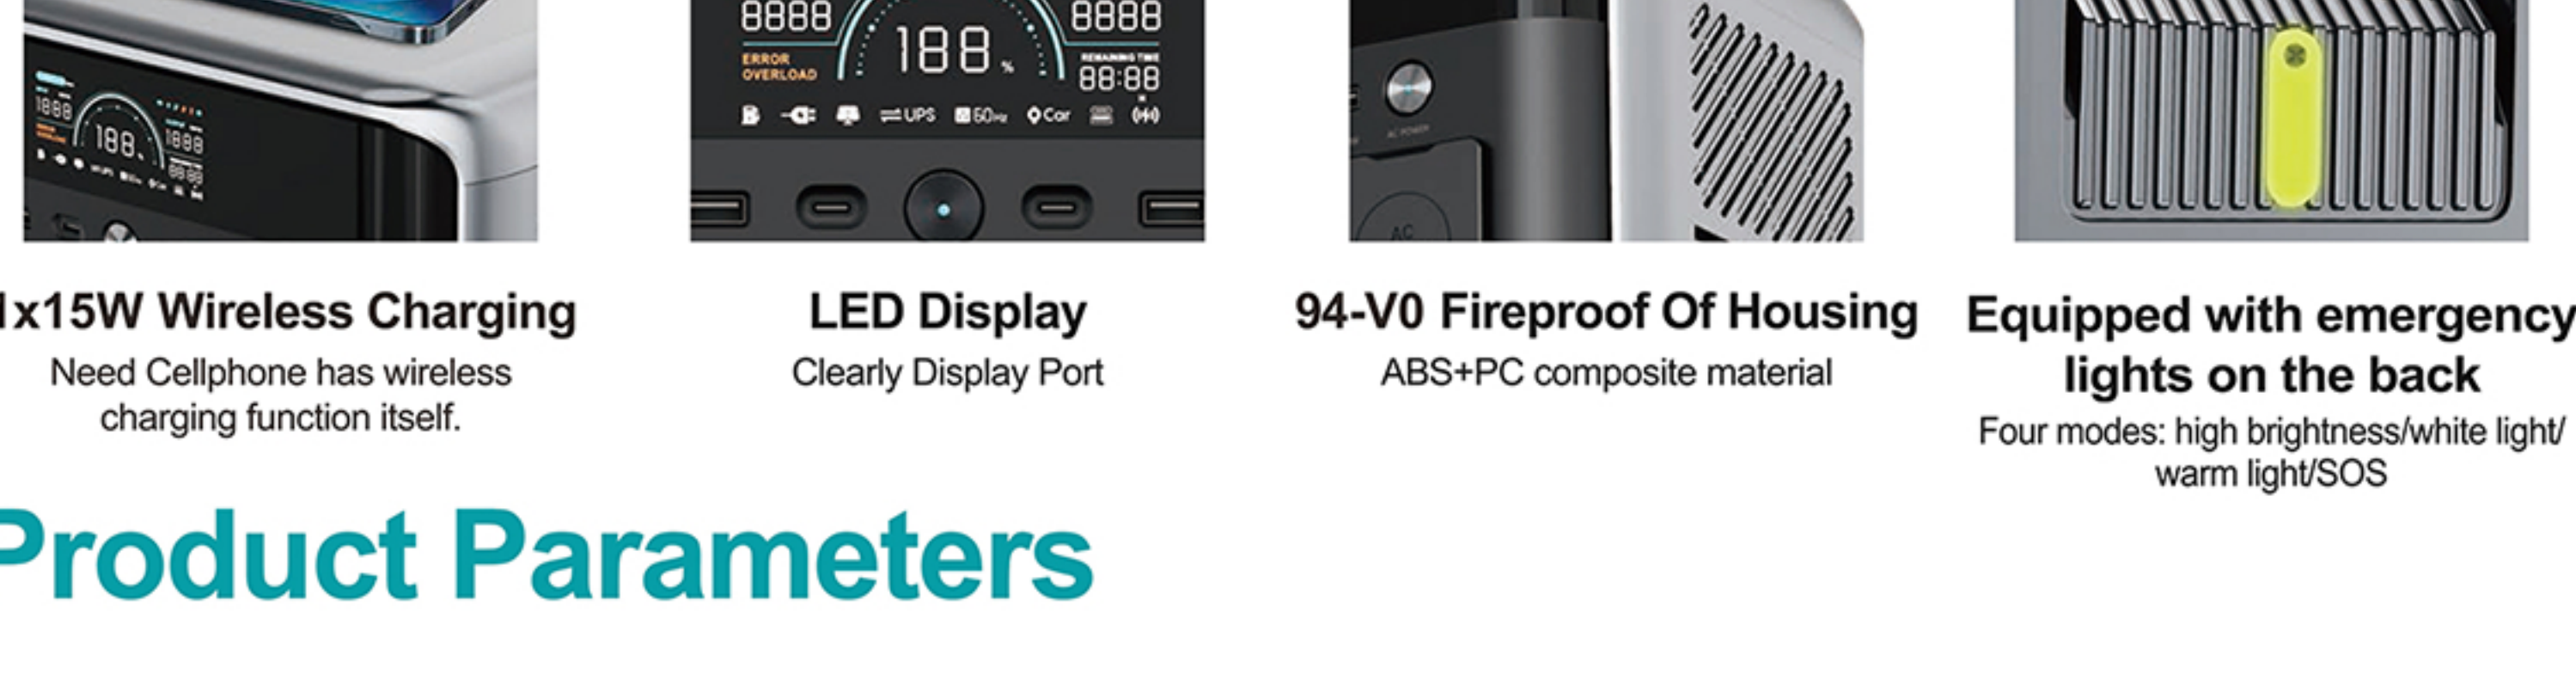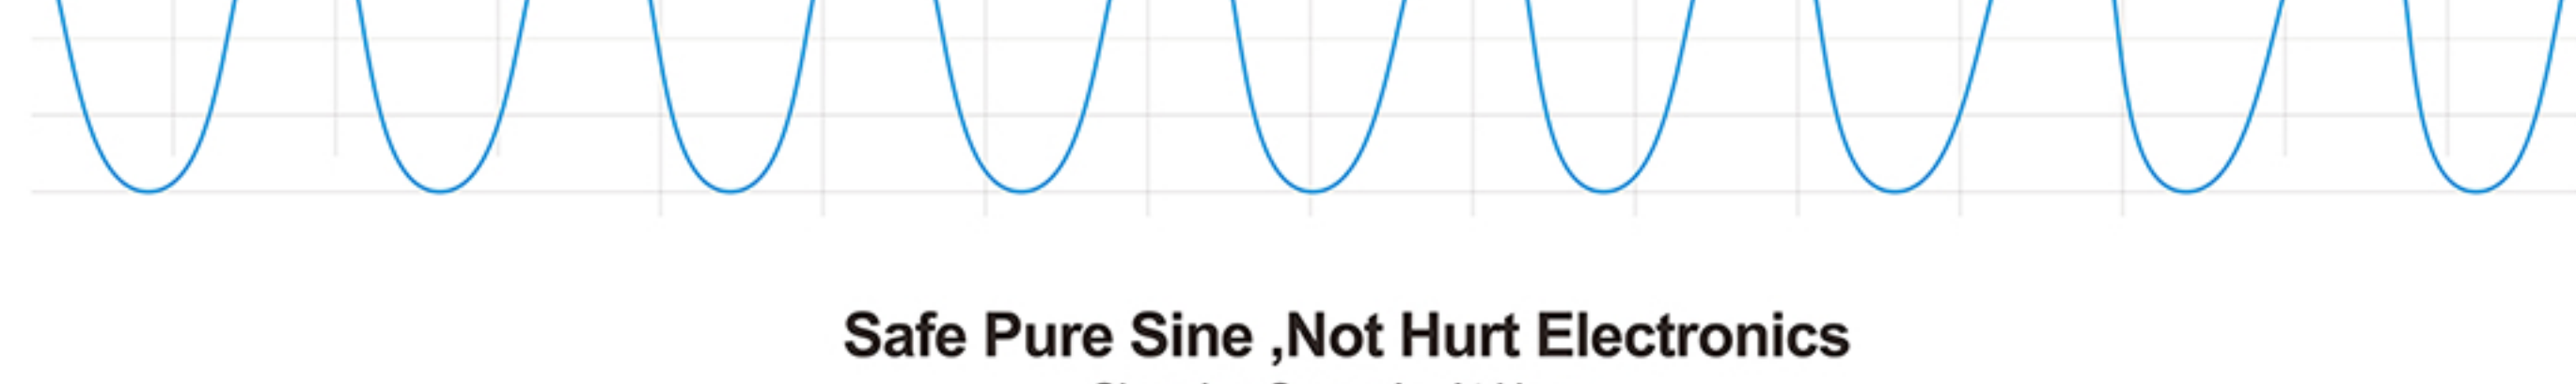

Product Size	21.5x11.8x11.8cm
Product Weight	7.5kg
Battery Rated Capacity	481.6Wh 21.5Ah
Input Parameters	
Input Voltage	100-240V AC

Cigarette Lighter Input	12/24V 8.5A Max	
Output Parameters		
AC Output(X2)	220V~ 50Hz 2.75A 600W Max(Pure Sine Wave)	
USB-A1Output	5V/3A, 9V/3A, 12V/2A, 20V/1.4A 28W Max	Two Ports Output at The Same Time: 5V=3.4A
USB-C1Output	5V/3A, 9V/3A, 12V/2A, 15V/3A, 20V/5A 100W Max	
USB-A2Output	5V/3A, 9V/2A, 12V/1.5A, 18W Max	Two Ports Output at The Same Time: 5V=3.4A
USB-C2Output	5V/3A, 9V/3A, 12V/2.5A, 30W Max	
Cigarette Lighter Output(X1)	12V/10A 120W Max	
DC5521Output(X2)	One Port12V/5A(Cigarette Lighter Port+DC5521x2Output at The Same time120W Max)	
Total Output	600W Max	
Work Temperature		
Discharging Temperature	-10°C-40°C	
Charging Temperature	0°C-40°C	
Certification: CE、TUV、FCC、CCC、UN38.3、MSDS、ROHS		

oor Camping

